


Film Data Sheet
Polacolor ID
Ultraviolet Pack Film

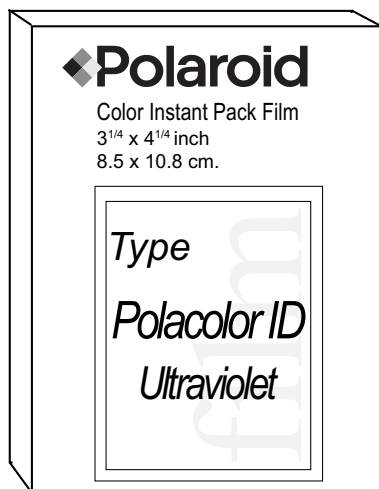

Film Speed

ISO 80/DIN 20

Format

3¹/₄ x 4¹/₄ in. (8.5 x 10.8 cm)
Pack Film

Image Area

2⁷/₈ x 3³/₄ in. (7.3 x 9.5 cm)

Finish

Glossy

Exposures per Unit

10 exposures per pack

Development Time

60 seconds at 75°F

Description

Medium-speed, medium-contrast, medium-grain, daylight (electronic flash) balanced color print film with security features.

Key Applications

- Identification cards
- Document or passport photography

Compatible Hardware

- Any camera equipped with a CB-103 Back, OEM CB-100 Back or Model 405 Film Holder
- ID systems: ID-3, ID-4, ID-100, OEM ID Systems
- Miniportrait cameras: 403/203, 402/202
- OEM cameras

Key Features

- Contains a security design feature which is only visible when viewed with ultraviolet light

Special Treatment

None

Alternative Products

- Polacolor ER (T-669) (ISO 80)
- Polacolor ER (T-108) (ISO 80)

Processing Information

Temperature °F	°C	Proc. Time (sec.)	Equivalent Film Speed (ISO/DIN)	Exposure Adjustment
95	35	60	200/24	-1 f/stop
85	29	60	160/23	- ¹ / ₂ f/stop
75	24	60	125/22	None
70	21	60	100/21	None
65	18	75	64/19	+ ¹ / ₂ f/stop
55	13	90	50/18	+1 stop*

*Yellow filtration may be required

Caution

This film uses a small amount of caustic paste. If any paste appears, avoid contact with skin, eyes and mouth and keep away from children and animals. **If you get some paste on your skin, wipe it off immediately, then wash with water to avoid an alkali burn.** If eye contact occurs, quickly wash the area with plenty of water and see a doctor. Keep discarded materials away from children, animals, clothing and furniture.

Limited Warranty

See information on the film box.