


Film Data Sheet
Polacolor 100 ID UV Pack Film
(sold only in Europe)

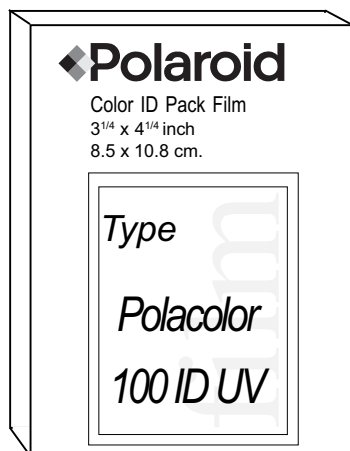

Film Speed

ISO 100/DIN 21

Format

3¹/₄ x 4¹/₄ in. (8.5 x 10.8 cm)
Pack Film

Image Area

2⁷/₈ x 3³/₄ in. (7.3 x 9.5 cm)

Finish

Glossy

Exposures per Unit

10 exposures per pack

Development Time

90 seconds at 70°F

Caution

This film uses a small amount of caustic paste. If any paste appears, avoid contact with skin, eyes and mouth and keep away from children and animals. **If you get some paste on your skin, wipe it off immediately, then wash with water to avoid an alkali burn.** If eye contact occurs, quickly wash the area with plenty of water and see a doctor. Keep discarded materials away from children, animals, clothing and furniture.

Limited Warranty

See information on the film box.

Description

Medium-speed, medium-contrast electronic flash balanced color print film with security features.

Key Applications

- Identification cards
- Document or passport photography

Compatible Hardware

- Any camera equipped with a CB-103 Back
- OEM CB-100 Back
- Model 405
- ID Systems: ID-3, ID-4, ID-100, OEM ID Systems

Color Balance

Electronic flash

Special Interest

Customized logo and/or designs possible with a minimum requirement of 1250 twinpacks of film.

Key Features

- Contains a security design feature which is only visible when viewed with ultraviolet light
- Contains a security design that is visible in normal light
- Contains a security design feature that combines both visible and ultraviolet light

Special Treatment

None

Alternative Products

- Polacolor 100 (ISO 100)
- Polacolor ID (ISO 80)
- T-669 (ISO 80)
- T-108 (ISO 80)

Processing Information

Temperature °F °C	Proc. Time	Equivalent Film Speed (sec.)	Exposure Adjustment (ISO)
95 35	90	200/24	-1 to 2 f/stop
85 29	90	160/23	- ² / ₃ to 2 f/stop
75 24	90	125/22	- ¹ / ₃ to 1 f/stop
70 21	90	100/21	None
65 18	120	80/20	+ ¹ / ₃ to 1 f/stop
60 15	120	64/19	+ ² / ₃ to 2 f/stop
55 13	120	50/18	+1 to 2 f/stop