




Kodak Alkaline Battery


K23A

Effective : April 2002

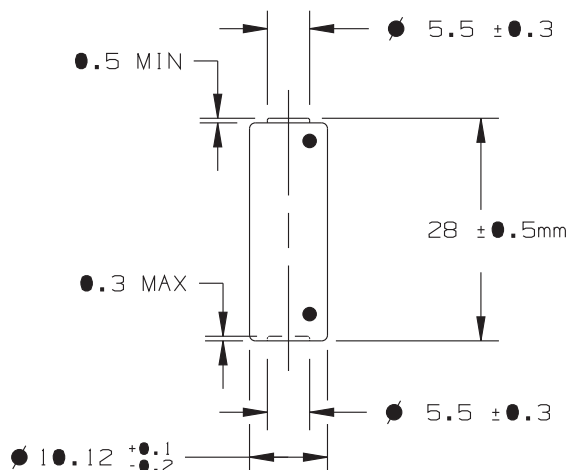

System:	Alkaline-Manganese Dioxide, Zn/MnO ₂
Designation:	ANSI 1811A, IEC -
Nominal Voltage:	12.0 Volts
Rated Capacity:	33 mAh to 6.0 Volts at 20K ohm load
Maximum Discharge:	0.5 mA Continuous, 5 mA Pulse
Temperature Range:	0°C to 54°C
Average Weight:	7.5 grams
Volume:	2.2 cm ³
Terminals:	Flat Contacts
Jacket:	Metal

Typical Discharge Characteristics K23A

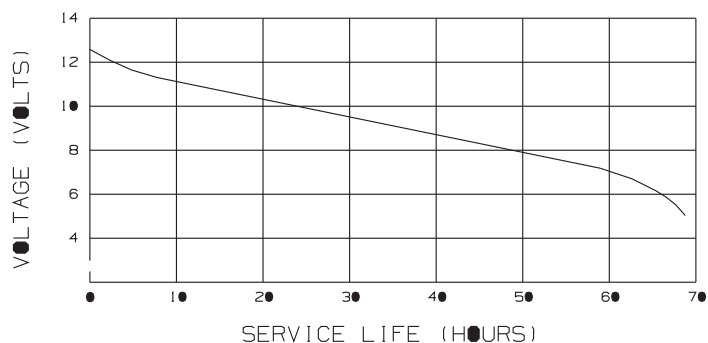

DISCHARGE RESISTANCE: 20K OHM
DISCHARGE CONDITION: 24 HRS/DAY
SERVICE LIFE: 66 HOURS
CUT-OFF VOLTAGE: 6.0 VOLTS

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.



For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries