

KODAK EDGE Generations Paper



KODAK EDGE Generations Paper is an exceptional new color negative paper for making color prints from color negatives. Its advanced emulsion technology delivers enhanced color reproduction and superior image stability. Designed to work well in both optical and digital imaging systems, it is replacing KODAK EKTACOLOR EDGE 7 Paper, KODAK EKTACOLOR EDGE 8 Paper, and KODAK EKTACOLOR EDGE 9 Paper.

This paper is available in a variety of sheet and roll sizes in E, F, and N surfaces. It is designed for processing in KODAK EKTACOLOR RA, KODAK EKTACOLOR PRIME, and KODAK EKTACOLOR PRIME LORR Chemicals for Process RA-4 or KODAK EKTACOLOR SM Chemicals for Process RA-2SM. Compared to EKTACOLOR EDGE 8 and EDGE 9 Paper, KODAK EDGE Generations Paper features the following improvements:

FEATURES	BENEFITS
Improved digital printing	- Improved detail and cleaner text - More robust calibration
Improved flesh tone reproduction	More natural skin tones
Enhanced tone scale	Improved flesh to neutral; warmer highlights

Compared to EKTACOLOR EDGE 7 Paper, this paper features the following improvements:

FEATURES	BENEFITS
Increased color saturation	- Richer, brighter, more compelling colors - More vibrant greens, blues, and reds
Enhanced flesh-tone reproduction	Exceptionally natural-looking skin tones
New raw stock color	Easier printer setup and focus
State-of-the-art image stability	- Improved light stability—Over 100 years before noticeable fading in typical home display - Significantly improved dark stability—Over 200 years before noticeable fading in the most common home storage conditions - Bold, bright colors that last longer
Technology optimized for KODAK Films	- The best possible prints from KODAK MAX, GOLD, ROYAL GOLD and ADVANTIX Films - Versatility to provide great results with other manufacturers' negative films
Improved process performance	- Improved resistance to abrasion marks during processing - Less waste - Reduced process sensitivity to leuco cyan dye in the bleach-fix (<pH 6.2)

STORAGE AND HANDLING

For optimum results, store unexposed paper at 13°C (55°F) or lower in the original package. You can store unexposed paper at 24°C (75°F) for up to 6 months and still achieve high-quality results. High temperatures or high humidity may produce unwanted changes.

To avoid moisture condensation on paper that has been refrigerated, allow it to warm up to room temperature before opening the package. For best results, remove the package from cold storage the day before you use it, or allow the paper to warm up for the appropriate time listed in the following table.

Handle paper carefully by the edges to avoid creases and fingerprints.

Minimum Warm-Up Time (Hours) at Ambient Temperature of 21°C (70°F)			
Size	From a Storage Temperature of		
	-18°C (0°F)	2°C (35°F)	13°C (55°F)
Rolls: cm x m (in. x ft)			
8.9 x 93 (3½ x 305)	5	3.5	2.5
8.9 x 186 (3½ x 610)	7.5	5.5	4
8.9 x 253 (3½ x 830)	8	6	4
8.9 x 372 (3½ x 1220)	10	8	6
10.2 x 93 (4 x 305)	5	4	2.5
10.2 x 186 (4 x 610)	8	6	4.4
10.2 x 253 (4 x 830)	9	7	5
10.2 x 372 (4 x 1220)	10.5	8	5.5
12.7 x 93 (5 x 305)	5.5	4	2.5
12.7 x 186 (5 x 610)	9	7	5
12.7 x 253 (5 x 830)	11	8.5	7
15.2 x 93 (6 x 305)	5.5	4.5	3
15.2 x 186 (6 x 610)	9.5	7.5	5
20.3 x 93 (8 x 305)	11	8	5.5
20.3 x 186 (8 x 610)			
25.4 x 93 (10 x 305)	6	4.5	3
25.4 x 186 (10 x 610)	11.5	8.5	6
27.9 x 93 (11 x 305)	6	4.5	3
30.5 x 93 (12 x 305)			
40.6 x 93 (16 x 305)			
50.8 x 93 (20 x305)			
Sheets			
20.3 x 25.4 cm (8 x 10 in.) (100-sheet box)	3	2	1.5
27.9 x 35.6 cm (11 x 14 in.) 40.6 x 50.8 cm (16 x 20 in.) (50-sheet box)	1.5	1	1

Warm-up times for pallets of paper will vary. For example, one pallet of 44 8.9 cm x 372 m (3½ in. x 1220-ft) rolls (4 stacks of 11 rolls) stored at 2°C (35°F) would require a minimum warm-up time of 24 hours at 21°C (70°F).

DARKROOM RECOMMENDATIONS

Handle this paper in *total darkness*. Be sure that your darkroom is lighttight. Eliminate any stray light from timers, LEDs, etc. EDGE Generations Paper is sufficiently sensitive to photographic process lighting (safelights) that sensitometric shifts may occur before D-min (fog) changes are seen.

Note: Using a safelight *will* affect your results. *If absolutely necessary*, you can use a safelight equipped with a KODAK 13 Safelight Filter (amber) with a 7½-watt bulb. Keep the safelight at least 4 feet (1.2 metres) from the paper. Keep safelight exposure as short as possible. Run tests to determine whether safelight use gives acceptable results for your application. For information on safelight testing, see KODAK Publication No. K-4, *How Safe is Your Safelight?*

EXPOSURE

You can expose this paper in automatic printers, such as KODAK CLAS 35 II and KODAK CLAS III Color Printers, KODAK CREATE-A-PRINT 35 mm Enlargement Centers, KODAK Minilab Systems, KODAK 3510 Color Printers, KODAK 312 Color Printers, KODAK I.LAB Digital High-Speed Printers, AGFA High-Speed Printers, GRETAG High-Speed Printers, GRETAG Minilabs and Microlabs, NORITSU Minilabs and Microlabs, FUJI FRONTIER and other FUJI Minilabs, KONICA Minilabs, PHOTO-ME Minilabs, and more.

Note: Printer and balance slope changes may be necessary. Check production after final balance. You may want to make a color preference adjustment.

If you are using Agfa MSP or MSC printers, visit <http://www.kodak.com/go/colorpapers> or contact your Kodak representative to obtain Schwarzschild coefficients. Agfa's current recommendation is that the Schwarzschild coefficients are the same for KODAK EDGE Generations Paper as for KODAK EKTACOLOR EDGE 8 and EDGE 9 Papers.

Because voltage changes affect the light output and color quality, use a voltage regulator. Use a tungsten-halogen lamp to expose the paper. Do not use a fluorescent lamp. If the printer has no means of removing infrared radiation, use a heat-absorbing glass.

Keep negatives and the optical system of your equipment clean. Mask negatives to eliminate stray light.

To control the color balance, use dichroic filters, KODAK Color Printing Filters (CP), or KODAK Color Compensating Filters (CC) placed between the lamp and the negative. You can also use CC filters between the lens and the paper if they are clean and unscratched. Use as few CC filters between the lens and the paper as possible—preferably not more than three. If you use cyan filtration, use filters with the suffix “-2,” such as CP10C-2.

Start with a filter pack of 40M + 40Y for the white-light method. Adjust filtration as necessary.

Printer Control Negative Sets

Use the appropriate KODAK Printer Balancing Kit to determine aims for KODAK Color Negative Films or to cross over from another type of color paper to KODAK EDGE Generations Paper.

LATENT-IMAGE KEEPING

For best results, process the paper on the same day that you expose it. (If latent-image shifts occur, minimize them by keeping the time between exposure and processing as consistent as possible.)

PROCESSING

Use KODAK EKTACOLOR Chemicals for Process RA-4 or KODAK EKTACOLOR SM Chemicals for Process RA-2SM. For FUJI FRONTIER Processors, use KODAK EKTACOLOR Processing Cartridge 111 and KODAK EKTACOLOR PC111 Rinse Tablets. Use KODAK Control Strips, Process RA-4 to monitor your process.

For more information on processing chemicals, see www.kodak.com/go/photochemicals.

Use a maximum drying temperature of 96°C (205°F).

VIEWING

Evaluate prints under light of the same color and brightness that you will use to view the final prints. For an average condition, use a light source with a color temperature of 5000 ± 1000 K, a Color Rendering Index (CRI) of 85 to 100 (an index of 90 or higher is desirable), and an illuminance up to 500 lux. Fluorescent lamps such as a cool white deluxe lamp (made by several manufacturers) meet these conditions. You can also use a mixture of fluorescent and incandescent lamps. For each pair of 40-watt cool white deluxe lamps, use a 75-watt frosted tungsten bulb.

PRINT FINISHING

Dust Spotting

Use KODAK Liquid Retouching Colors to correct dust spots on prints made with this paper. To apply dyes, follow this procedure:

1. If necessary, clean the surface of the print by buffing it with a tuft of cotton before you start retouching. Be careful not to scratch the surface. Protect the print from fingerprints and perspiration by wearing cotton gloves (e.g., KODAK Cotton Gloves).
2. Transfer a small amount of the dye(s) you need to a palette.
3. If necessary, add a touch of neutral dye to the puddle of pure colored dye. The neutral dye will reduce the brilliance of the pure colors by adding density. For good control, keep the dilutions weak by adding a little distilled water. This allows you to build up the dye gradually on the print. It is easier to add dye gradually than to remove it if you apply too much.

Note: If the liquid dyes on your palette dry out, you can add water to dilute them again.

4. Pick up a small amount of dye with your brush, and stroke the brush on newsprint or a paper towel to blot it *thoroughly*. Too much moisture can cause opalescence, or a cloudy look, on the print. Rotate the tip on the newsprint to form a good point. Do not use your tongue or lips to form a tip.
5. Retouch the print with light strokes of the brush; be sure to keep the dye within the area of the spot. Avoid spilling over into the surrounding area. Any overlapping will result in a dark ring around the spotted area.
6. If you apply too much color, blot it quickly with newsprint or you will have too much density in the spot. If too much dye penetrates the emulsion, you can remove it with a 5-percent clear ammonia-water solution. (You can make a 5-percent solution by mixing 5 parts of 28-percent liquid ammonium hydroxide with 23 parts water.) Apply the solution with a tuft of cotton, rubbing it with a circular motion. Be sure to apply it only to the area where you want to remove the dye. Then swab the area with clean water-dampened cotton. Repeat if necessary with a fresh tuft of cotton. Be sure to remove all of the ammonia. Allow the area to dry thoroughly before you resume retouching. For best results, remove unwanted dye quickly.

STORAGE AND DISPLAY OF PRINTS

KODAK EDGE Generations Paper has been formulated to provide improved dye stability and print longevity for prints displayed under typical home lighting conditions (i.e., 120 lux for 12 hours a day), and typical home dark storage conditions (i.e., 20 to 23°C [68 to 73.4°F] and 50% relative humidity). Product modifications have provided an improvement in the fade neutrality when compared with previous papers.

Despite the improvements in print longevity and fade neutrality, photographic dyes, like all dyes, can change with time and exposure to sunlight, ultraviolet radiation, excessive heat, and high humidity. To help prevent changes in photographic dyes, follow these guidelines:


- Illuminate prints with tungsten light whenever possible.
- Display prints in the lowest light level consistent with your viewing needs.
- If a print is exposed to direct or indirect sunlight or fluorescent light, use an ultraviolet-absorbing filter (such as glass) between the light source and the print.
- Keep the temperature and humidity as low as possible.
- For prints displayed behind glass, maintain a slight separation between the prints and the glass.
- Use album materials described in KODAK Publication No. E-30, *Storage and Care of KODAK Photographic Materials—Before and After Processing*.

SIZES AVAILABLE


Roll Width	Roll Length					
	93 m (305 ft)	186 m (610 ft)	253 m (830 ft)	333 m (1092 ft)	372 m (1220 ft)	575 m (1886 ft)
8.2 cm (3.25 in.)	✓		✓			
8.9 cm (3.5 in.)	✓	✓	✓	✓	✓	✓
10.2 cm (4 in.)	✓	✓	✓	✓	✓	✓
11.7 cm (4.6 in.)		✓				
12.1 cm (4.75 in.)		✓				
12.7 cm (5 in.)	✓	✓	✓	✓		
15.2 cm (6 in.)	✓	✓				
20.3 cm (8 in.)	✓	✓				
25.4 cm (10 in.)	✓	✓				
27.9 cm (11 in.)	✓					
30.5 cm (12 in.)	✓					
40.6 cm (16 in.)	✓					
50.8 cm (20 in.)	✓					
Sheets: 20.3 x 25.4 cm (8 x 10-in.), 27.9 x 35.6 cm (11 x 14-in.), 40.6 x 50.8 cm (16 x 20-in.), 50.8 x 76.2 cm (20 x 30-in.)						

CURVES


Characteristic Curves

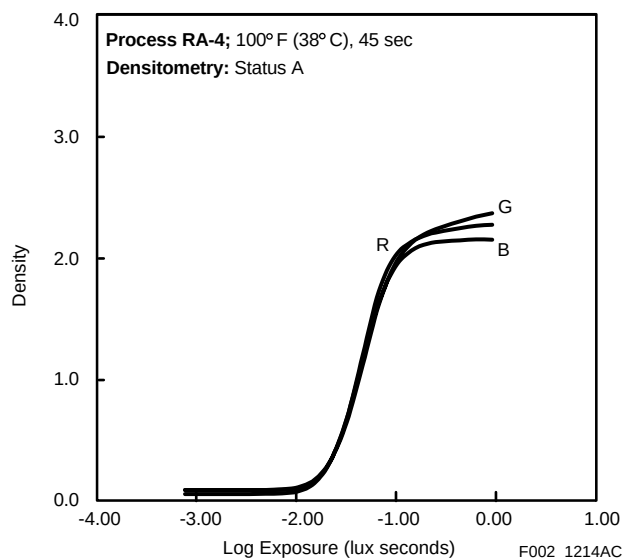

Spectral Dye Density Curves

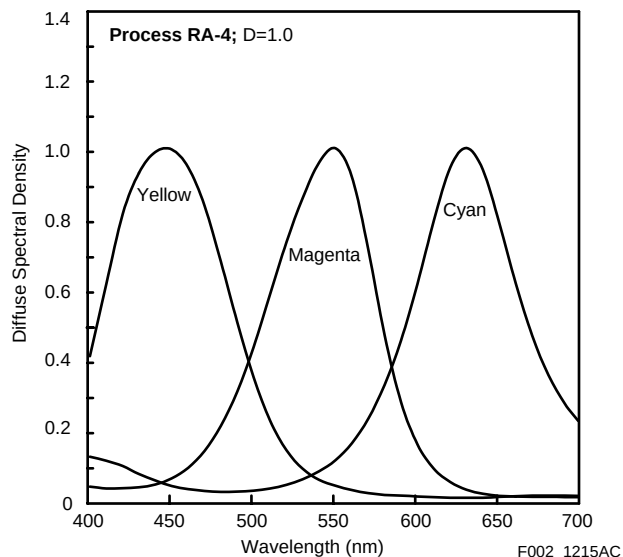

Spectral Sensitivity Curves

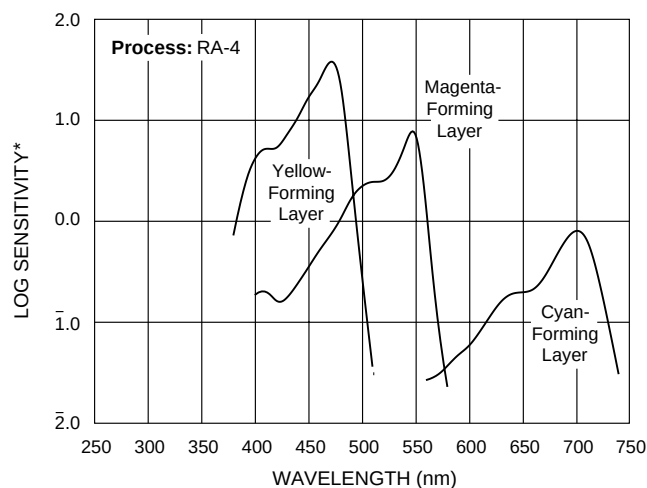

*Sensitivity = reciprocal of exposure (ergs/cm²) required to produce specified density

F002_1049AC

NOTICE: The sensitometric curves and data in this publication represent product tested under the conditions of exposure and processing specified. They are representative of production coatings, and therefore do not apply directly to a particular box or roll of photographic material. They do not represent standards or specifications that must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

KODAK EDGE Generations Paper

MORE INFORMATION

Kodak has many publications to assist you with information on KODAK products, equipment, and materials.

Additional information on KODAK EDGE Generations Paper is available on the Kodak website at:

<http://www.kodak.com/go/colorpapers>. Additional information on KODAK Chemicals and paper processing is available at <http://www.kodak.com/go/photochemicals>.

The following publications are available from dealers who sell KODAK products, or you can contact Kodak in your country for more information.

E-30 *Storage and Care of KODAK Photographic Materials—Before and After Processing*

For the latest version of technical support publications for KODAK Products, visit Kodak online at:
<http://www.kodak.com>

If you have questions about KODAK Products, call Kodak.

In the U.S.A.:

1-800-242-2424, Monday–Friday
9 a.m.–7 p.m. (Eastern time)

In Canada:

1-800-465-6325, Monday–Friday
8 a.m.–5 p.m. (Eastern time)

Note: The KODAK materials described in this publication for use with KODAK EKTACOLOR EDGE Generations Paper are available from dealers who supply KODAK Products to photofinishers. You can use other materials, but you may not obtain similar results.

Consumer Imaging
EASTMAN KODAK COMPANY • ROCHESTER, NY 14650

